


MODEL

6216SS-EX

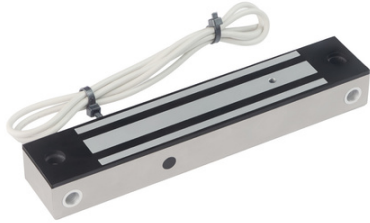

600 MONITORED S/STEEL WEATHERPROOF MAGLOCK

12/24 VDC (Available in monitored and unmonitored versions.)

600 monitored stainless steel weatherproof electromagnetic lock designed for outdoor access control applications requiring a 275 kg holding force. Built-in reed switch for door status monitoring and weatherproof construction, making it ideal for gates and other external installations.

CE certified and manufactured under strict quality control.



IP68 Tested
IEC 60529



Life Safety
Applications



Zero Residual
Magnetism



RoHS
Compliant



12/24 VDC
Selectable



MOV Surge &
Spike Protection

SPECIFICATIONS


	Holding Force	Up to 600lbs (275kg)
	Lock Status Monitoring	Yes
	Current / Voltage	12VDC : 480mA ±10% 24VDC : 240mA ±10%
	EST Weight	2kg approx
	Housing	Stainless Steel
	Operating Temperature	-10 ~ +55° C
	Operating Humidity	0~95% (non condensing)

DIMENSIONS (mm)


CODE: 6216SS-EX

	Maglock Size (L × W × H)	216 × 41 × 28 mm
	Armature Plate Size (L × W × H)	180 × 38 × 11 mm

MAGLOCK

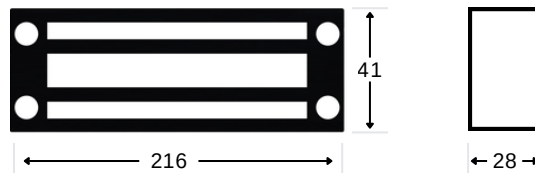

ARMATURE PLATE

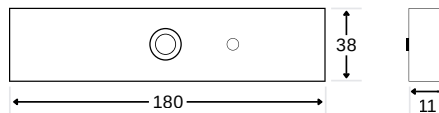

Note: All dimensions are in millimetres (mm). Dimensions shown are nominal. Unless otherwise specified, a manufacturing tolerance of ±0.5 mm applies.

COMPATIBLE BRACKETS



TB-6216SS

ESI Access Sdn Bhd

24, Jalan Industri USJ 1/12, Taman Perindustrian
USJ 1, 47610 Subang Jaya, Selangor, Malaysia.

+603 8024 9318

sales@esi-access.com

www.esi-access.com

