

MODEL

# MT600



## 600 MONITORED MORTICE MAGLOCK

### 12/24 VDC (Available in monitored and unmonitored versions.)

600 monitored mortice electromagnetic lock for sliding door access control applications, providing a 275 kg holding force. Offers a flush, seamless installation and is equipped with relay outputs for remote signalling.

CE certified and manufactured under strict quality control.



Life Safety  
Applications



Zero Residual  
Magnetism



RoHS  
Compliant



12/24 VDC  
Selectable



MOV Surge &  
Spike Protection

## SPECIFICATIONS


|                                                                                    |                               |                                          |
|------------------------------------------------------------------------------------|-------------------------------|------------------------------------------|
|  | <b>Holding Force</b>          | Up to 600lbs (275kg)                     |
|  | <b>Lock Status Monitoring</b> | Yes                                      |
|  | <b>Current / Voltage</b>      | 12VDC : 480mA ±10%<br>24VDC : 240mA ±10% |
|  | <b>EST Weight</b>             | 2kg approx                               |
|  | <b>Housing</b>                | Anodized Aluminium                       |
|  | <b>Operating Temperature</b>  | -10 ~ +55° C                             |
|  | <b>Operating Humidity</b>     | 0~95% (non condensing)                   |

## DIMENSIONS (mm)


CODE: MT00/MT00R

|                                                                                     |                                            |                  |
|-------------------------------------------------------------------------------------|--------------------------------------------|------------------|
|  | <b>Maglock Size<br/>(L × W × H)</b>        | 230 × 38 × 27 mm |
|  | <b>Armature Plate Size<br/>(L × W × H)</b> | 180 × 38 × 11 mm |

### MAGLOCK

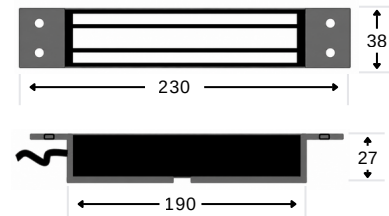


### ARMATURE PLATE

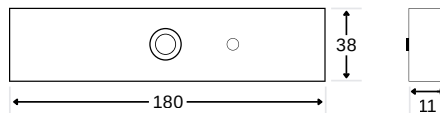

Note: All dimensions are in millimetres (mm). Dimensions shown are nominal. Unless otherwise specified, a manufacturing tolerance of ±0.5 mm applies.

## COMPATIBLE BRACKETS

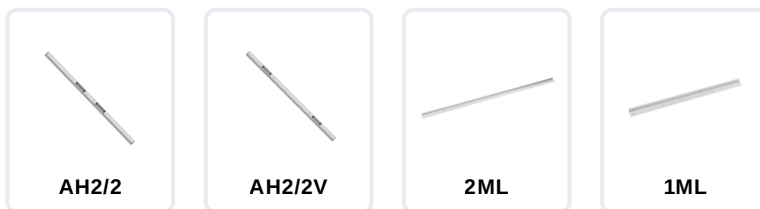

## ESI Access Sdn Bhd

24, Jalan Industri USJ 1/12, Taman Perindustrian  
USJ 1, 47610 Subang Jaya, Selangor, Malaysia.

+603 8024 9318

sales@esi-access.com

www.esi-access.com

